


LABEL BACKLIGHTS

CONNECT YELLOW WIRES TO DC- (GROUND)
CONNECT RED WIRES TO DC + 12V

POWER SOURCE ON INDICATOR (GREEN LED)

CONNECT WHITE WIRE WITH 230V AC NEUTRAL WIRE ALSO CONNECTED TO LOAD SIDE OF RESIDUALCURRENT DEVICE, (RCD)
CONNECT BLACK WIRE WITH 230V AC HOT WIRE ALSO CONNECTED TO LOAD SIDE OF RESIDUAL CURRENT DEVICE (RCD)

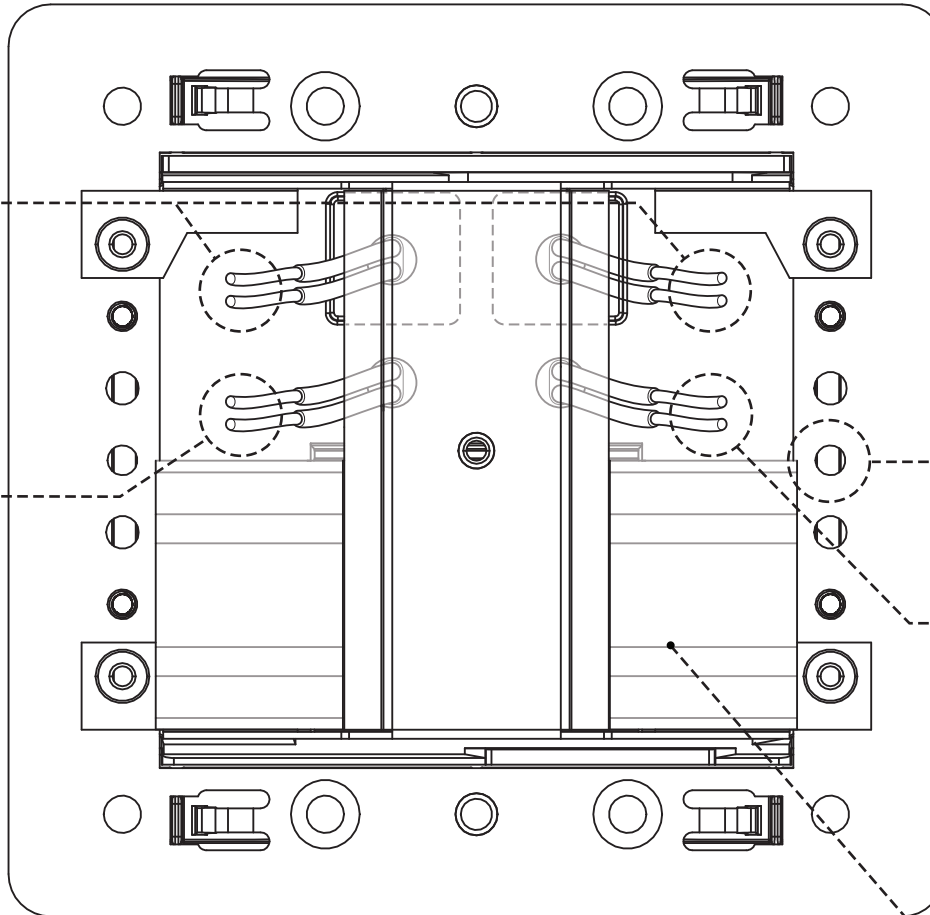

CONNECT GREEN/YELLOW WIRE TO AC SAFETY GROUND (EARTH)

REVERSE POLARITY INDICATOR (RED LED)

CONNECT WHITE WIRE TO LINE SIDE NEUTRAL OF 230V AC SOURCE
CONNECT GREEN WIRE TO SAFETY GROUND (EARTH)

DIN MOUNT (RCD)
NOT SUPPLIED